



Princess Sumaya
University
for Technology

Princess Sumaya University for Technology
King Abdullah II School of Engineering

EE27355
Communication Principles

Quiz #5
Thursday 2/4/2026

Name:.....



Section 1

Q.1) Use the frequency shift property and Table 3.1 to find the Fourier transform of the signal shown in Figure Q.1.



Figure Q.1

Solution: [5-Points]

$$g(t) = \text{rect}\left(\frac{t}{2}\right) \longleftrightarrow 2 \text{sinc}(\omega)$$

$$\text{rect}\left(\frac{t}{\tau}\right) \longleftrightarrow \tau \text{sinc}\left(\frac{\omega\tau}{2}\right)$$

$$g(t+3) - g(t-3) \longleftrightarrow 2j[2 \text{sinc}(\omega) \sin 3\omega] = 4j \text{sinc}(\omega) \sin 3\omega$$

Q.2) Use the frequency shift property and Table 3.1 to find the inverse Fourier transform of the spectra shown in Figure Q.2.

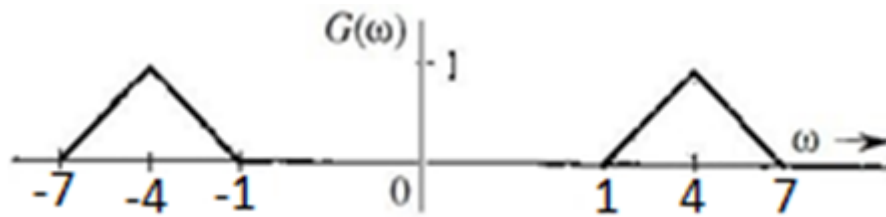


Figure Q.2

Solution: [5-Points]

$$G(\omega) = \Delta\left(\frac{\omega + 4}{6}\right) + \Delta\left(\frac{\omega - 4}{6}\right)$$

| | |
|---|---|
| $\Delta\left(\frac{t}{\tau}\right)$ | $\frac{\tau}{2} \text{sinc}^2\left(\frac{\omega\tau}{4}\right)$ |
| $\frac{W}{2\pi} \text{sinc}^2\left(\frac{Wt}{2}\right)$ | $\Delta\left(\frac{\omega}{2W}\right)$ |

$$\frac{3}{2\pi} \text{sinc}^2\left(\frac{3}{2}t\right) \longleftrightarrow \Delta\left(\frac{\omega}{6}\right)$$

$W=3$

$$g(t) = \frac{3}{\pi} \text{sinc}^2\left(\frac{3}{2}t\right) \cos 4t$$

Q.3) Use the frequency shift property and Table 3.1 to find the inverse Fourier transform of the spectra shown in Figure Q.3.

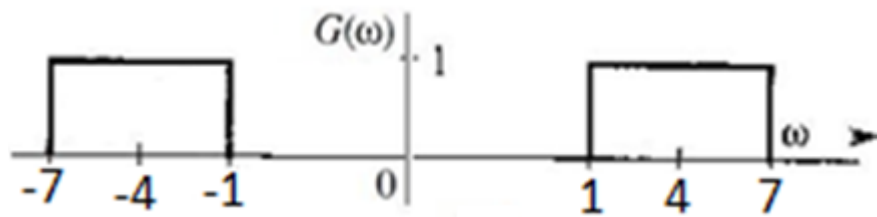


Figure Q.3

Solution: [5-Points]

| | |
|--|---|
| $\text{rect}\left(\frac{t}{\tau}\right)$ | $\tau \text{sinc}\left(\frac{\omega\tau}{2}\right)$ |
| $\frac{W}{\pi} \text{sinc}(Wt)$ | $\text{rect}\left(\frac{\omega}{2W}\right)$ |

$W=3$

$$G(\omega) = \text{rect}\left(\frac{\omega - 4}{6}\right) + \text{rect}\left(\frac{\omega + 4}{6}\right)$$

$$\frac{3}{\pi} \text{sinc}(3t) \longleftrightarrow \text{rect}\left(\frac{\omega}{6}\right)$$

$$g(t) = \frac{6}{\pi} \text{sinc}(3t) \cos 4t$$

Q.4) For the signal $g(t)=[2a/(t^2+a^2)]$, determine the essential bandwidth B Hz of $g(t)$ such that the energy contained in the spectral components of $g(t)$ of frequencies below B Hz is 99% of the signal energy E_g .

Solution: [5-Points]

$$\frac{2a}{t^2+a^2} \xrightarrow{F} \frac{2a}{a^2+\omega^2}$$

$$\frac{2a}{a^2+t^2} \xrightarrow{F} 2\pi e^{-a|\omega|}$$

$$E_g = \frac{1}{2\pi} \int_{-\infty}^{\infty} |G(\omega)|^2 d\omega$$

$$= \frac{1}{2\pi} (2) \int_0^{\infty} (2\pi)^2 e^{-2a\omega} d\omega$$

$$= \frac{4\pi^2}{2\pi} \frac{1}{2a} e^{-2a\omega} \Big|_0^{\infty}$$

$$= \frac{4\pi^2}{2\pi a} [e^{-2a\infty} - e^0]$$

$$= -\frac{2\pi}{a} [0 - 1]$$

$$= \frac{2\pi}{a}$$

$$0.99 \frac{2\pi}{a} = \frac{1}{2\pi} \int_{-W}^W |G(\omega)|^2 d\omega$$

$$= \frac{2}{2\pi} 4\pi^2 \int_0^W e^{-2a\omega} d\omega$$

$$= 4\pi \frac{1}{2a} e^{-2a\omega} \Big|_0^W$$

$$0.99 \frac{2\pi}{a} = \frac{2\pi}{a} [e^{-2aW} - 1]$$

$$\frac{2\pi}{a} e^{-2aW} = [1 - 0.99] \frac{2\pi}{a}$$

$$e^{-2aW} = 0.01$$

$$W = \frac{2.3025}{a}$$

Answer / $2(3.14) = 0.366/a$

Table 3.1

Short Table of Fourier Transforms

| | $g(t)$ | $G(\omega)$ | |
|----|--|---|-----------------------------|
| 1 | $e^{-at} u(t)$ | $\frac{1}{a + j\omega}$ | $a > 0$ |
| 2 | $e^{at} u(-t)$ | $\frac{1}{a - j\omega}$ | $a > 0$ |
| 3 | $e^{-a t }$ | $\frac{2a}{a^2 + \omega^2}$ | $a > 0$ |
| 4 | $t e^{-at} u(t)$ | $\frac{1}{(a + j\omega)^2}$ | $a > 0$ |
| 5 | $t^n e^{-at} u(t)$ | $\frac{n!}{(a + j\omega)^{n+1}}$ | $a > 0$ |
| 6 | $\delta(t)$ | 1 | |
| 7 | 1 | $2\pi \delta(\omega)$ | |
| 8 | $e^{j\omega_0 t}$ | $2\pi \delta(\omega - \omega_0)$ | |
| 9 | $\cos \omega_0 t$ | $\pi [\delta(\omega - \omega_0) + \delta(\omega + \omega_0)]$ | |
| 10 | $\sin \omega_0 t$ | $j\pi [\delta(\omega + \omega_0) - \delta(\omega - \omega_0)]$ | |
| 11 | $u(t)$ | $\pi \delta(\omega) + \frac{1}{j\omega}$ | |
| 12 | $\text{sgn } t$ | $\frac{2}{j\omega}$ | |
| 13 | $\cos \omega_0 t u(t)$ | $\frac{\pi}{2} [\delta(\omega - \omega_0) + \delta(\omega + \omega_0)] + \frac{j\omega}{\omega_0^2 - \omega^2}$ | |
| 14 | $\sin \omega_0 t u(t)$ | $\frac{\pi}{2j} [\delta(\omega - \omega_0) - \delta(\omega + \omega_0)] + \frac{\omega_0}{\omega_0^2 - \omega^2}$ | |
| 15 | $e^{-at} \sin \omega_0 t u(t)$ | $\frac{\omega_0}{(a + j\omega)^2 + \omega_0^2}$ | $a > 0$ |
| 16 | $e^{-at} \cos \omega_0 t u(t)$ | $\frac{a + j\omega}{(a + j\omega)^2 + \omega_0^2}$ | $a > 0$ |
| 17 | $\text{rect} \left(\frac{t}{\tau} \right)$ | $\tau \text{sinc} \left(\frac{\omega\tau}{2} \right)$ | |
| 18 | $\frac{W}{\pi} \text{sinc} (Wt)$ | $\text{rect} \left(\frac{\omega}{2W} \right)$ | |
| 19 | $\Delta \left(\frac{t}{\tau} \right)$ | $\frac{\tau}{2} \text{sinc}^2 \left(\frac{\omega\tau}{4} \right)$ | |
| 20 | $\frac{W}{2\pi} \text{sinc}^2 \left(\frac{Wt}{2} \right)$ | $\Delta \left(\frac{\omega}{2W} \right)$ | |
| 21 | $\sum_{n=-\infty}^{\infty} \delta(t - nT)$ | $\omega_0 \sum_{n=-\infty}^{\infty} \delta(\omega - n\omega_0)$ | $\omega_0 = \frac{2\pi}{T}$ |
| 22 | $e^{-t^2/2\sigma^2}$ | $\sigma \sqrt{2\pi} e^{-\sigma^2 \omega^2/2}$ | |

Table 3.2

Fourier Transform Operations

| Operation | $g(t)$ | $G(\omega)$ |
|-----------------------|----------------------------|---|
| Addition | $g_1(t) + g_2(t)$ | $G_1(\omega) + G_2(\omega)$ |
| Scalar multiplication | $kg(t)$ | $kG(\omega)$ |
| Symmetry | $G(t)$ | $2\pi g(-\omega)$ |
| Scaling | $g(at)$ | $\frac{1}{ a } G \left(\frac{\omega}{a} \right)$ |
| Time shift | $g(t - t_0)$ | $G(\omega) e^{-j\omega t_0}$ |
| Frequency shift | $g(t) e^{j\omega_0 t}$ | $G(\omega - \omega_0)$ |
| Time convolution | $g_1(t) * g_2(t)$ | $G_1(\omega) G_2(\omega)$ |
| Frequency convolution | $g_1(t) g_2(t)$ | $\frac{1}{2\pi} G_1(\omega) * G_2(\omega)$ |
| Time differentiation | $\frac{d^n g}{dt^n}$ | $(j\omega)^n G(\omega)$ |
| Time integration | $\int_{-\infty}^t g(x) dx$ | $\frac{G(\omega)}{j\omega} + \pi G(0) \delta(\omega)$ |